


Fireriser® Butterfly Valve

Bronze Butterfly Valves Grooved 300PSI

Fig No.:BBG-300

Working pressure:

300 PSI (21 Bars)
 Max. Test Pressure: 600 PSI (42.8 Bars)
 Max. Working Temp.: 250°F (120°C)
 Factory installed UL, listed double Tamper Switches
 Valve Approved For Indoor and Outdoor Use




Grooved Ends to suit BS or ANSI pipe size



Materials List

| Name | Material |
|------------|--------------------------|
| Body | Bronze C836000 |
| Disc | Stainless Steel AISI 304 |
| Hand Wheel | WCB |
| Seat | Viton |
| Indicator | Powder Metal |
| Housing | Forged Brass |

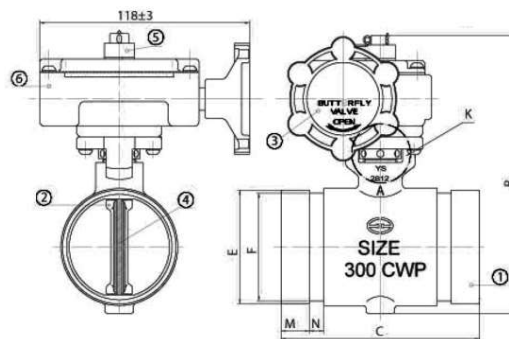

Dimensions(inch/mm):

| Size | 1.25"/32 | 1.5"/40 | 2"/50 | 2.5"/65 |
|-----------|----------|---------|-------|---------|
| B | 138.9 | 145.9 | 159 | 175.5 |
| C | 98 | 102 | 104 | 114 |
| ØE | 42.4 | 48.3 | 60.3 | 73 |
| ØF | 38.99 | 45.09 | 57.15 | 69.09 |
| M | 15.88 | 15.88 | 15.88 | 15.88 |
| N | 7.95 | 7.95 | 7.95 | 7.95 |

Net Weight (kg) and Crate Qty (pcs)

| Size | 1.25"/32 | 1.5"/40 | 2"/50 | 2.5"/65 |
|------------------|----------|---------|-------|---------|
| N.W. | 1.80 | 1.87 | 2.17 | 2.80 |
| Crate Qty | 6 | 6 | 6 | 6 |